




Lab-Line
Dri-Baths™



Analog and Digital Modular Block



Model 2002 and 2000 Dri-Baths

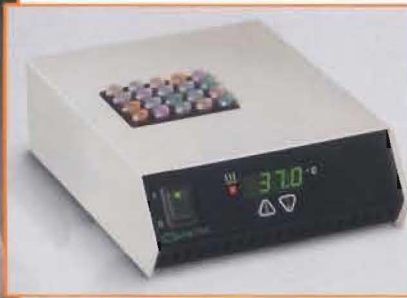

Choose From Analog and Digital!

- Digital units include built-in temperature sensing probe
- Choose from 1, 2, 3, 4, and 6 block configurations



- Dri-baths hold one to six interchangeable modular blocks to accommodate a variety of vessels. Modular blocks sold separately.
- Use Lab-Line brand blocks only.
- Temperature Range: ambient +5°C to 130°C.

Analog Units

- Temperature control at 37°C: ±1.5°C.
- Temperature uniformity at 37°C: ±0.5°C.
- Read thermometer and adjust knob controller to your desired setpoint.

Digital Units

- Temperature control at 37°C: ±0.1 to 0.2°C.
- Temperature uniformity at 37°C: ±0.1 to 0.4°C.
- Set point is easily adjusted by using up and down arrow keys located on the front of the unit.
- Modular block mounts on a single temperature probe in the bottom of the dri-bath providing better temperature accuracy and control.

Digital Version Includes
FREE Temperature Probe

Product Description

- Compact design saves valuable bench space.
- Powder-coated steel body construction ensures durability.
- Digital units utilize a PID microprocessor controller with digital temperature set and easy-to-read LED display for accurate and reproducible temperature control.
- Analog units feature a bimetallic dual thermostat control as an economical alternative.

PRODUCT SPECIFICATIONS AND ORDERING INFORMATION

Microprocessor Controlled Dri-Baths - Digital

Model #	Description	Volts	Electrical (50/60 Hz)		Overall Dimensions Inches (cm)			Shipping Weight Lb. (kg)
			Amps	Watts	W	H	D	
2000 ^{1,2}	Single block	120	0.83	100	8.7 (22.1)	3.6 (9)	11.2 (28.4)	5 (2)
2000-1CE ^{1,4}	Single block	240	0.42	100	8.7 (22.1)	3.6 (9)	11.2 (28.4)	5 (2)
2001 ^{1,2,3,5}	Double block	120	1.25	150	8.7 (22.1)	3.6 (9)	14.2 (36)	6 (3)
2001-1CE ^{1,4}	Double block	240	0.63	150	8.7 (22.1)	3.6 (9)	14.2 (36)	6 (3)
2002 ^{1,2}	Triple block	120	1.67	200	10.8 (27.4)	3.6 (9)	12.0 (30.4)	8 (4)
2002-1CE ^{1,4}	Triple block	240	0.83	200	10.8 (27.4)	3.6 (9)	12.0 (30.4)	8 (4)
2003 ^{1,2}	Four block	120	2.5	300	10.8 (27.4)	3.6 (9)	14.1 (35.5)	8 (4)
2003-1CE ^{1,4}	Four block	240	1.25	300	10.8 (27.4)	3.6 (9)	14.1 (35.5)	8 (4)
2004 ^{1,2}	Six block	120	3.33	400	10.8 (27.4)	3.6 (9)	17.0 (43.0)	10 (5)
2004-1CE ^{1,4}	Six block	240	1.67	400	10.8 (27.4)	3.6 (9)	17.0 (43.0)	10 (5)

Bimetallic Controlled Dri-Baths - Analog

2050 ^{1,2,3}	Single block	120	0.83	100	6.2 (16)	3.4 (9)	7.6 (19)	5 (2)
2050-1CE ^{1,4}	Single block	240	0.42	100	6.2 (16)	3.4 (9)	7.6 (19)	5 (2)
2052 ^{1,2,3}	Double block	120	1.25	150	8.4 (21)	3.4 (9)	8.6 (22)	6 (3)
2052-1CE ^{1,4}	Double block	240	0.63	150	8.4 (21)	3.4 (9)	8.6 (22)	6 (3)
2053 ^{1,2,3}	Triple block	120	1.67	200	11.25 (29)	3.4 (9)	9.1 (23)	8 (4)
2053-1CE ^{1,4}	Triple block	240	0.83	200	11.25 (29)	3.4 (9)	9.1 (23)	8 (4)
2054 ^{1,2,3}	Four block	120	2.50	300	8.3 (21)	3.4 (9)	12.4 (31)	8 (4)
2054-1CE ^{1,4}	Four block	240	1.25	300	8.3 (21)	3.4 (9)	12.4 (31)	8 (4)
2056 ^{1,2,3}	Six block	120	3.33	400	11.25 (29)	3.4 (9)	12.9 (33)	10 (5)
2056-1CE ^{1,4}	Six block	240	1.67	400	11.25 (29)	3.4 (9)	12.9 (33)	10 (5)

¹ ETL, ² CSA, ³ UL, ⁴ CE, ⁵ CUL

All models include heavy duty 3-wire line cord and block puller; 120 volt models include plug.

Connect With Us

