



BT-150  
Reciprocal Shaker Bath

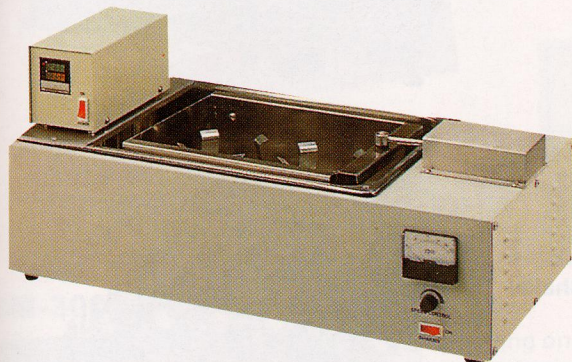

BT-350  
Reciprocal Shaker Bath

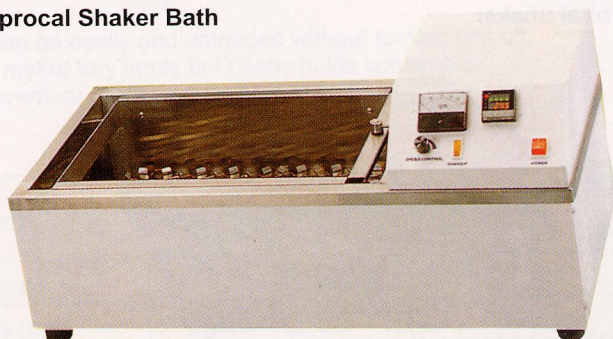


Below ambient temperature extra handy cooler(BD-20)

BT-350R  
Reciprocal Shaker Bath




BT-210  
Accessories Platform

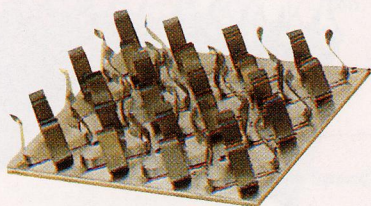

Test tube racks and covers are sold separately

BT-220  
Tube Rack

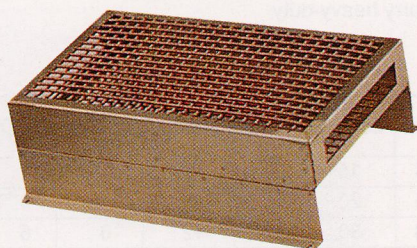

with Refrigerated from 0°C~100°C  
An increased temperature range from 0°C to 100°C can be supplied

Capacity for flasks			
Capacity model	BT-150	BT-350	BT-350R
50ml	20	40	
125ml	12	24	
250ml	6	15	
500ml	4	8	
1000ml	2	6	
2000ml	1	2	

- Designed to be operated under general laboratory conditions for all needs requiring controlled shaking and temperature conditions
- PID temperature control is proportional-integral-derivative for excellent temperature stability  $\pm 0.05^\circ\text{C}$
- LED display temperature
- Speed control from 10-200 rpm
- Optional tube racks or clamps (50ml-500ml)

## SPECIFICATION

Item	Temperature					Shaking		Pump	Compressor	Heater	Dimensions		
	Range	Control	Display	Accuracy	Cooler	Speed	Stroke				Platform	Internal	External
BT-150	Ambient to 100°C	PID	LED	$\pm 0.05^\circ\text{C}$	NO	Adjustable 10~200rpm	38mm or 50mm	circulating pump	-	1000W	WxD(cm) 30x20	WxDxH(cm) 50x29x15	WxDxH(cm) 65.5x35x33
BT-350	Ambient to 100°C	PID	LED	$\pm 0.05^\circ\text{C}$	NO	Adjustable 10~200rpm	38mm or 50mm	circulating pump	-	1600W	WxD(cm) 45x33	WxDxH(cm) 69x33x31	WxDxH(cm) 84x40x34
BT-350R	0°C to 100°C	PID	LED	$\pm 0.05^\circ\text{C}$	Yes	Adjustable 10~200rpm	38mm or 50mm	circulating pump	1/4 hp.	1600W	WxD(cm) 45x33	WxDxH(cm) 69x33x31	WxDxH(cm) 84x40x34

Connect With Us

