

## Technical data for Extractor apparatus, Soxhlet. Flasks ST 29/32.

Capacity of extractor ml	*30	70	*100	150	200	*250	300	*500	*1000	2000
Capacity of flask ml	100	100	250	250	250	500	500	1000	2000	2000
Suitable extraction thimbles:										
Socket lenght mm	80	100	94	130	123	205	145	230	315	330
Socket I. D. mm	22	25	33	33	43	33	48	48	57	75
Cone of condenser ST	29/32	34/35	45/40	45/40	45/40	45/40	60/46	60/46	71/51	45/40
Flat flanges NW	—	—	—	—	—	—	—	—	—	100

\* acc. to DIN 12602




### Extraction apparatuses, solid, Soxhlet, complete.

Capacity of extractor ml	Complete	Top
30	2.230.030	2.212.030
70	2.330.070	2.212.070
100	2.230.100	2.212.100
150	2.230.150	2.212.150
200	2.230.200	2.212.200
250	2.230.250	2.212.250
300	2.230.300	2.212.300
500	2.230.500	2.212.500
1000	2.230.001	2.212.001
2000	2.230.002	2.212.002

### Condensers. For Extraction apparatuses.

For capacity of extractor ml	Length mm	Cone ST	Allihn-Condenser	Dimroth-Condenser
30	250	29/32	2.200.029	2.202.029
70	250	34/35	2.200.034	2.202.034
100-250	250	45/40	2.200.045	2.202.045
300-500	250	60/46	2.200.060	2.202.060
1000	250	71/51	—	2.202.071
2000	300	45/40	—	2.202.145

\*.\*\*\*.\*\*\*S. Instead of the conentional hose connection made of glass we offer our SVS-hose connection Cat. No. 0.185.001 (Please add „S“ behind the article no., surcharge see price list).

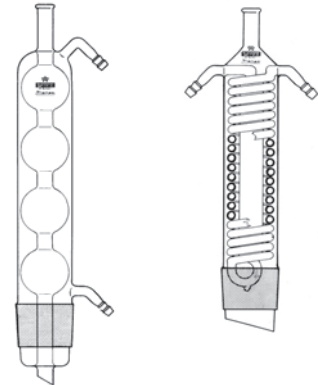

### Extraction thimbles, made of fat-free filter paper. Suitable for extraction apparatus acc. to Soxhlet and similiar systems. Other sizes on request.



For Extractor capacity ml	I. D. mm	Height mm	
30	22	80	8.205.001
70	25	100	8.205.002
100	33	94	8.205.004
150	35	150	8.205.006
200	41	123	8.205.007
250	33	205	8.205.008
300	48	145	8.205.009
500	44	230	8.205.010
1000	53	315	8.205.011
2000	75	330	8.205.012

### Connect With Us

